

**Q1** *DNS over TCP (SU20 Final Q6)*

**(20 points)**

Standard DNS uses UDP to send all queries and responses. Consider a modified DNS that instead uses TCP for all queries and responses.

Q1.1 (3 points) Which of the following does DNS over TCP guarantee against a man-in-the-middle attacker? Select all that apply.

- Confidentiality                       Authenticity  
 Integrity                                 None of the above

Q1.2 (3 points) Compared to standard DNS, does DNS over TCP defend against more attacks, fewer attacks, or the same amount of attacks against an on-path attacker?

- More attacks                               Fewer attacks  
 Same amount of attacks

Q1.3 (5 points) What fields does an off-path attacker *not know* and need to *guess* correctly to spoof a response in DNS over TCP? Assume source port randomization is enabled. Select all that apply.

- TCP sequence numbers       Recursive resolver port       DNS NS records  
 Name server port               DNS A records                   None of the above

Q1.4 (3 points) Is the Kaminsky attack possible on DNS over TCP? Assume source port randomization is disabled.

- Yes, because the attacker only needs to guess the DNS Query ID  
 Yes, but we consider it infeasible for modern attackers  
 No, because the attacker cannot force the victim to generate a lot of DNS over TCP requests  
 No, because TCP has integrity guarantees



(Question 1 continued...)

Q1.5 (3 points) Recall the DoS amplification attack using standard DNS packets. An off-path attacker spoofs many DNS queries with the victim's IP, and the victim is overwhelmed with DNS responses.

Does this attack still work on DNS over TCP?


- Yes, the attack causes the victim to consume more bandwidth than the standard DNS attack
- Yes, the attack causes the victim to consume less bandwidth than the standard DNS attack
- No, because the DNS responses no longer provide enough amplification
- No, because the attacker cannot force the server to send DNS responses to the victim

Q1.6 (3 points) What type of off-path DoS attack from lecture is DNS over TCP vulnerable to, but standard DNS not vulnerable to? Answer in five words or fewer.

## Q2 Caltopia DNS (SP21 Final Q8)

(13 points)

EvanBot is trying to determine the IP address of `caltopia.com` with DNS. However, some attackers on the network want to provide EvanBot with the wrong answer.

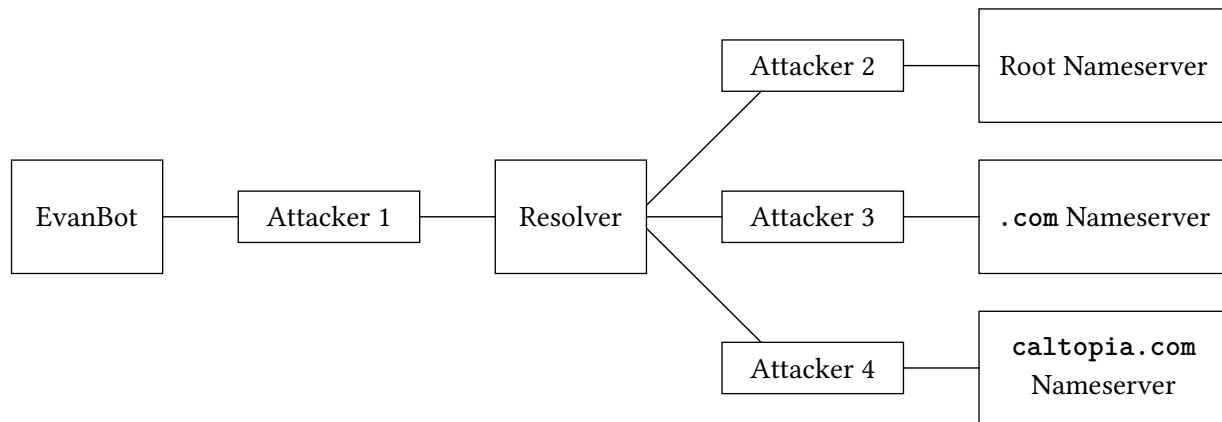

Assumptions:

- Each attacker is a man-in-the-middle (MITM) attacker between their two neighbors on the diagram above.
- No attackers can perform a Kaminsky attack.
- Standard DNS (not DNSSEC) is used unless otherwise stated.
- No private keys have been compromised unless otherwise stated.
- In each subpart, both EvanBot's cache and the local resolver's cache start empty.
- Each subpart is independent.

*Clarification during exam:* Assume that bailiwick checking is in use for this entire question.

In each subpart, EvanBot performs a DNS query for the address of `caltopia.com`.

Q2.1 (4 points) In this subpart only, assume the attackers only passively observe messages.

Which of the attackers would observe an **A** record with the IP address of `caltopia.com` as a result of EvanBot's query? Select all that apply.

- Attacker 1                       Attacker 3                       None of the above
- Attacker 2                       Attacker 4

Q2.2 (3 points) Which of the attackers can poison the local resolver's cached record for `cs161.org` by injecting a record into the additional section of the DNS response? Select all that apply.

*Note: Attacker 1 has intentionally been left out as an answer choice.*

- Attacker 2                       Attacker 4
- Attacker 3                       None of the above

(Question 2 continued...)

Q2.3 (4 points) Assume that the resolver and the name servers all validate DNSSEC, but EvanBot does not validate DNSSEC. Which of the attackers can poison EvanBot's cached record for `caltopia.com` by modifying the DNS response? Select all that apply.

- Attacker 1                       Attacker 3                       None of the above
- Attacker 2                       Attacker 4

Q2.4 (2 points) TRUE OR FALSE: DNSSEC prevents Attacker 4 from learning the IP address of `caltopia.com`.

- TRUE               FALSE